


640nm, 32mW Wavelength Stabilized Lasers

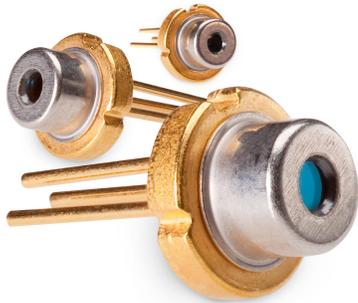

Single Frequency
Wavelength Stability: $\sim 0.015\text{nm}/^\circ\text{C}$

Ondax's 640nm Wavelength Stabilized Laser is a single mode, single frequency laser packaged in an ultra-compact, TO-can footprint. The extremely narrow linewidth, broad temperature operating characteristics, and low power consumption deliver affordable, portable instrument-quality performance for a broad range of instrumentation applications.

All SureLock™ Series lasers are stabilized using the Ondax PowerLocker® Volume Holographic Grating (VHG), ensuring precise, ultra-stable center wavelengths, low temperature dependence, and consistent optical performance over the locked region.

Specifications:

Specification Summary

| Parameter | Symbol | Min | Typ | Max | Unit |
|---|-----------------|-----|-----|-----|------------------|
| Output Power | P_o | | | 32 | mW |
| Center Wavelength (vacuum) ¹ | L_p | 639 | 640 | 641 | nm |
| Linewidth (MHz) | $\Delta\lambda$ | | 300 | | MHz |
| Central Stabilized Temperature | T_c | 15 | | 45 | $^\circ\text{C}$ |
| Stabilized Temperature Range | T_r | 10 | 14 | | $^\circ\text{C}$ |

Operating Specifications

| Parameter | Symbol | Min | Typ | Max | Unit |
|------------------------------------|------------|------|-------|-----|------------------|
| Threshold Current (CW) | I_{th} | | 45 | 60 | mA |
| Operating Current | I_{op} | | 80 | 105 | mA |
| Operating Voltage | V_{op} | | 2.4 | 2.6 | V |
| Laser Reverse Voltage | V_{rl} | | | 2 | V |
| Photodiode Reverse Voltage | V_{rp} | | | 30 | V |
| Monitoring Output Current | I_m | 0.07 | 0.15 | 0.2 | mA |
| Beam Divergence, Perpendicular | Q_v | 16 | 21 | 24 | Degrees |
| Beam Divergence, Parallel | Q_h | 7 | 10 | 13 | Degrees |
| Off Axis Angle, Perpendicular | dQ_v | - | - | - | Degrees |
| Off Axis Angle, Parallel | dQ_h | - | - | - | Degrees |
| Emitter Size | | | 1 x 2 | | μm |
| Differential Efficiency | DE (dP/dI) | | 1 | | mW/mA |
| Operating Temperature ³ | T_{op} | -10 | | 50 | $^\circ\text{C}$ |
| Storage Temperature ³ | T_s | -40 | | 80 | $^\circ\text{C}$ |
| Polarization Ratio | | | 60:1 | | |
| Polarization Orientation | | | TM | | |

¹Please specify wavelength at time of ordering ²Non-condensing ³All specifications are at rated power with a case temperature of 25 $^\circ\text{C}$ unless otherwise noted

Features:


- Single frequency performance
- Narrow linewidth 300 MHz
- Wavelength stability across operating range 0.015nm/ $^\circ\text{C}$
- Coherence length 0.5m
- Compact, hermetically sealed TO footprint
- Custom wavelengths available
- NoiseBlock™ narrow-band ASE suppression filters and beamsplitters available in matching wavelengths to further reduce linewidth and ASE noise

Applications:


- HeNe Replacement
- Raman Spectroscopy
- Metrology
- Bio-instrumentation
- Graphic Arts
- Sensing
- Analytical Instrumentation

640nm, 32mW Wavelength Stabilized Lasers


Stabilized Temperature Range

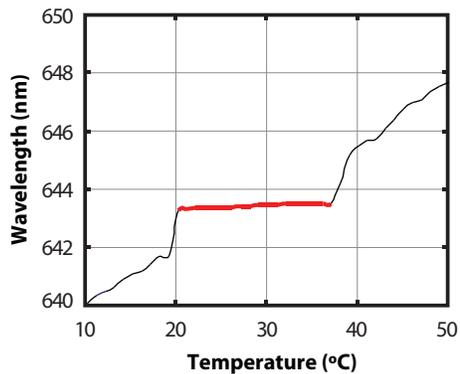


Output Power vs Forward Current (Typical)

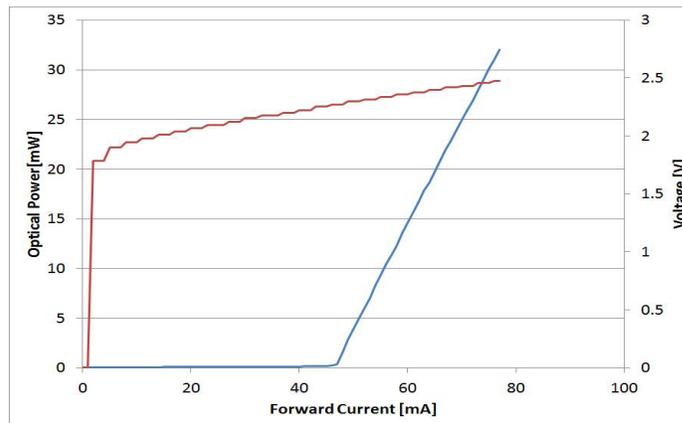

Side View

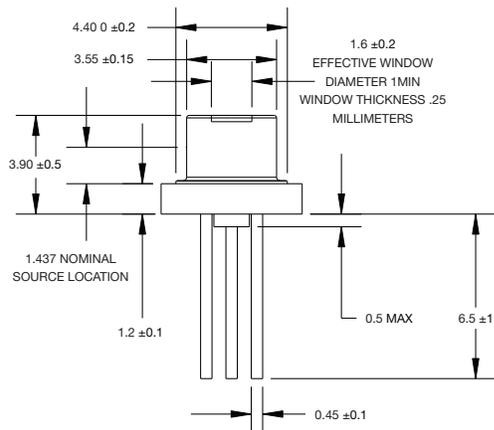


Bottom View

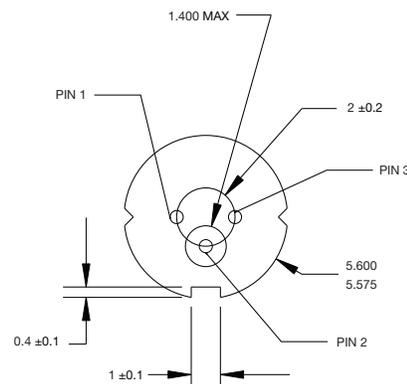

Pinout

| Pin | Description |
|-----|--------------------|
| 1 | Photodiode Cathode |
| 2 | Case |
| 3 | Laser Diode Anode |



Model Numbers

T0-640-PLR32

